

# Clarke<sup>TM</sup>

## ENGINEERS WORKBENCH

Model Nos.

CWB1000 • CWB1500 • CWB2000

## ASSEMBLY INSTRUCTIONS

Thank you for purchasing this CLARKE Engineers Workbench. Please follow these Assembly instructions carefully.



Workbench shown with optional single drawer fitted.

Three Drawer units are also available.

Two of these optional drawer units may be fitted to Model CWB2000. All Drawers are lockable

	CWB1000	CWB1500	CWB2000
Dimensions (mm):	1000x650x880	1500x650x880	2000x650x880
Weight (kg):	51	65	87
Part No.	6500120	6500122	6500123

### GUARANTEE

This product is guaranteed against faults in manufacture for 12 months from purchase date. Please keep your receipt as proof of purchase.

This guarantee is invalid if the product has been found to have been abused in any way, or not used for the purpose for which it was intended, or to have been tampered with in any way.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission. The reason for return must be clearly stated.

This guarantee does not affect your statutory rights.


Unpack your workbench and check to ensure that no damage was suffered during transit. Should any damage be apparent, you should contact your Clarke dealer immediately.  
The kit comprises the workbench top, lower tray and four legs with 12xM10 bolts with nuts and flat washers.

## ASSEMBLY

1. The workbench is best assembled with the use of an assistant.
2. Rest the workbench top on its rear edge, and at each of the rear mountings, attach a leg, with the foot pad downwards, using two M10 bolts with each leg, ensuring a flat washer is used with the nut. Nip up the nuts - **DO NOT** fully tighten.  
Ensure the legs used for the rear mountings are those where the two lower holes are adjacent, and not offset, see illustration below.
3. Attach the front legs in a similar manner using a single M10 Bolt with nut and flat washer. **DO NOT** fully tighten.
4. Position the lower tray between the legs, using an assistant, and bolt it to the legs, using M10 bolts with nuts and flat washers. **DO NOT** fully tighten the nuts. **NOTE The tray will only fit one way round, as illustrated below.**
5. Finally, turn the workbench on to its feet and shake it vigorously to ensure it is completely stable and resting on all four legs, then fully tighten all nuts.

If single drawers are purchased, they are simply slotted into place in the runners provided (not shown in the illustration below). If 3-Drawer units are purchased, refer to the assembly instructions provided.

**NOTE: A steel reinforced pad is provided on models 1500 and 2000, in order a vice may be attached (see illustration below)**

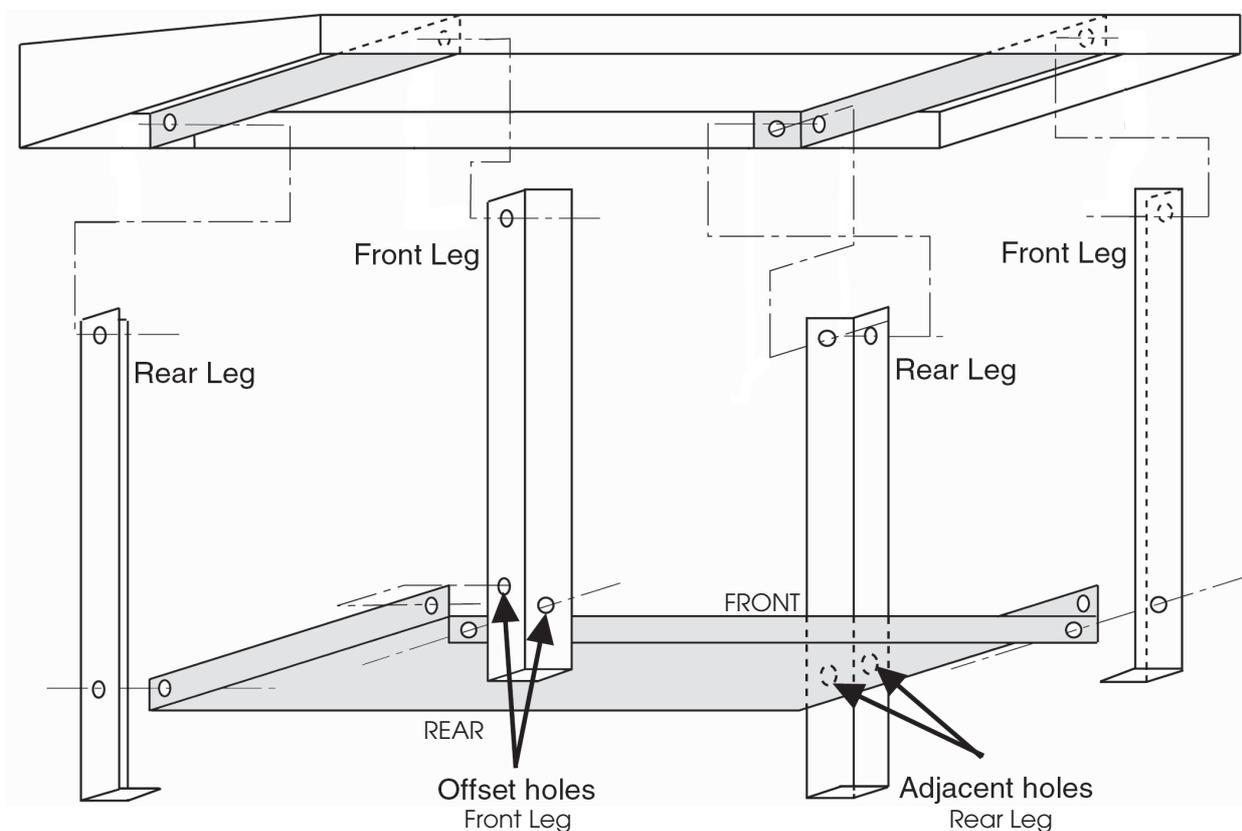

## PARTS & SERVICE CONTACTS

For Spare Parts and Service, please contact your nearest dealer, or CLARKE International, on one of the following numbers.

**PARTS & SERVICE TEL: 020 8988 7400**

**PARTS & SERVICE FAX: 020 8558 3622**

or e-mail as follows:

**PARTS: [Parts@clarkeinternational.com](mailto:Parts@clarkeinternational.com)**

**SERVICE: [Service@clarkeinternational.com](mailto:Service@clarkeinternational.com)**