



Model Number: CHT697

Part Number: 1801697

## BEARING RACE AND SEAL DRIVER SET



### SAFETY



**WARNING: THE WARNINGS, CAUTIONS AND INSTRUCTIONS DISCUSSED IN THIS SHEET CANNOT COVER ALL POSSIBLE CONDITIONS AND SITUATIONS THAT MAY OCCUR. IT MUST BE UNDERSTOOD THAT COMMON SENSE AND CAUTION ARE FACTORS WHICH MUST BE APPLIED BY THE OPERATOR.**


**WARNING: ALWAYS WEAR APPROVED EYE PROTECTION WHEN USING THE DRIVER. FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY. NORMAL SPECTACLES ARE NOT ADEQUATE PROTECTION.**

1. Familiarise yourself with the specific applications and limitations of the driver, as well as any potential hazards.
2. Strike the driver squarely on the head - DO NOT hit the tool off centre, or at an angle.
3. If unsure of the applications or limitations of the driver, contact your supplier.
4. Ensure that the driver is the correct tool for the task. DO NOT use the driver for any purpose other than that for which it is designed.
5. Replace or repair damaged parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.
6. DO NOT use the driver if it is bent, chipped, has a mushroom head, or is otherwise damaged as this may cause failure and/or personal injury.
7. Ensure that the workpiece is stable and that there is adequate lighting.
8. Maintain your correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
9. Use the correct size and type of hammer for the task. The recommended diameter of the hammer face is 10 mm larger than tool head. Check that the hammer handle is in good condition and is secure in the hammer head.

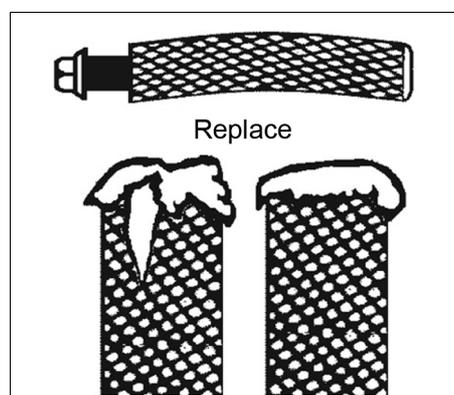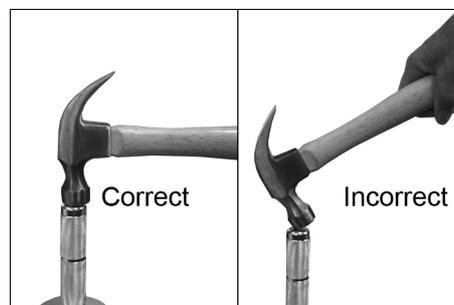

**NOTE:** For seal installation a soft-faced hammer should be adequate and will be less likely to damage the tool.

10. DO NOT strike the side of the driver body.
11. Make sure that the face of the hammer and the head of the tool are clean and free from grease, oil, etc.
12. Position the tool so that it is struck away from your body.
13. DO NOT use the driver when you are tired or under the influence of alcohol, drugs or intoxicating medication.
14. Keep children and unauthorised persons away from the working area.
15. When not in use, pack into the case, and store in a safe, dry, childproof location.

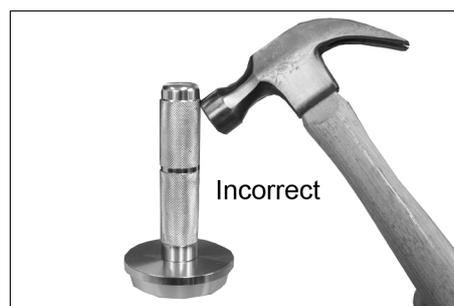

## CONTENT

1	HANDLE
2	ADAPTOR, 39.5mm
3	ADAPTOR, 44.5mm
4	ADAPTOR, 50mm
5	ADAPTOR, 59mm
6	ADAPTOR, 63mm
7	ADAPTOR, 65mm
8	ADAPTOR, 72mm
9	ADAPTOR, 76mm
10	ADAPTOR, 81mm



Check the contents and contact your Clarke dealer if any items are missing or damaged.

## USAGE

**WARNING: WE RECOMMEND THAT SAFETY GOGGLES ARE WORN WHEN USING THIS TOOL.**



1. Remove bolt (B) from handle (A).
2. Select the correct adaptor (C) and position it correctly on the handle, securing it using the bolt (B).
  - The adaptor should be one which is slightly smaller than the diameter of the seal/bearing.
3. Place the seal/bearing race (E or F) in the mouth of the housing (D).
4. Place the adaptor against the seal/bearing race and tap the driver handle to force it into place.

