



Faulty goods should be returned to their place of purchase, no product can be returned without prior permission. This guarantee does not affect your statutory rights. In the event of stock shortages CLARKE International reserves the right to replace faulty items with a similar item of equivalent value.

Your scope is guaranteed by Clarke International for a period of 10 years from the date of purchase. Please keep your receipt as proof of purchase. The guarantee covers the replacement or repair free of charge in the unlikely event of the equipment becoming faulty as a result of faulty manufacturing; no liability can be accepted for faults arising from accident or misuse. This guarantee is invalid if the product is found to have been abused, dropped or tampered with in any way, or not used for the purpose for which it was intended.

**Clarke 10 YEAR GUARANTEE**

**Clarke INTERNATIONAL**  
 020 - 8998 - 7400  
 Email: [Sales@clarkeinternational.com](mailto:Sales@clarkeinternational.com) or [Service@clarkeinternational.com](mailto:Service@clarkeinternational.com)

**A SELECTION FROM THE VAST RANGE OF**

**Clarke**  
**QUALITY PRODUCTS**

**AIR COMPRESSORS**  
 From 2000psi to 10000psi, Clarke offers a wide range of air compressors for all your needs.

**GENERATORS**  
 Clarke generators are available in a wide range of sizes and power outputs.

**POWER WASHERS**  
 Clarke power washers are available in a wide range of sizes and power outputs.

**WELDERS**  
 Clarke welders are available in a wide range of sizes and power outputs.

**REPAIRING**  
 Clarke repair kits are available for a wide range of tools and equipment.

**WOODWORKING**  
 Clarke woodworking tools are available in a wide range of sizes and power outputs.

**METALS**  
 Clarke metalworking tools are available in a wide range of sizes and power outputs.

**WATER PUMPS**  
 Clarke water pumps are available in a wide range of sizes and power outputs.

**POWER TOOLS**  
 Clarke power tools are available in a wide range of sizes and power outputs.

**STARTERS/CHARGERS**  
 Clarke starters and chargers are available in a wide range of sizes and power outputs.

**Clarke**  
**SPOTTING SCOPE**  
**15/45 X 50**



**Part No 4499200**

# Clarke<sup>®</sup> INTERNATIONAL

Thank you for purchasing this **CLARKE** spotting scope.

Your new Scope is manufactured to a very high standard, if used as directed will ensure you achieve many years of trouble free use.


Please read these instructions carefully before using your scope.

## SAFETY PRECAUTIONS

**NEVER** look directly at the sun with scope, as by doing so could lead to permanent loss of vision.

**NEVER** place the scope in a position where the sun can be directed through the lenses, Fire may result as a consequence.

- A - Objective Lens.
- B - Scope Body.
- C - Focusing Ring.
- D - Zoom Ring.
- E - Eyepiece with roll up cap.
- F - Pan Lever.
- G - Tripod.
- H - Scope Securing Screw.

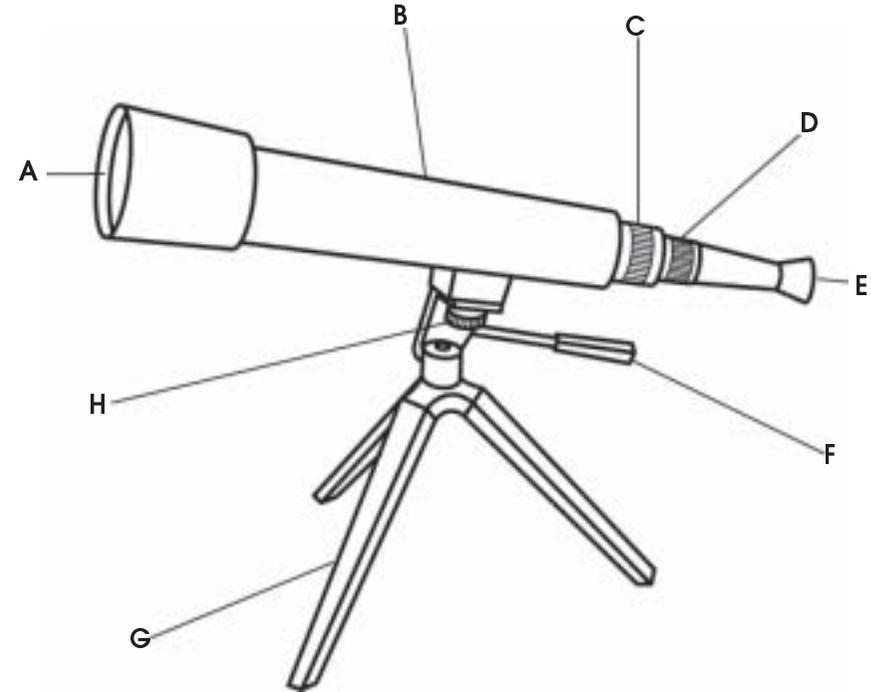

## Specifications

Ideal for nature and bird watching, features a powerful zoom, focus control and large objective lens with blue anti-glare coating. Soft rubber eyepiece for viewing comfort, also can be rolled back for users wearing glasses. Complete with metal tripod and carry case.

### Spotting Scope Part No 4499200

<u>Magnification</u>	<u>Objective Lens Dia</u>	<u>Prism Type</u>	<u>Weight</u>	<u>Length</u>	<u>Field Of View (Width)</u>
15X to 45X	50mm	Roof Prism	1.2Kg	530mm	15X = 54m@1000m 45X = 18m@1000m

### TAKING CARE OF YOUR SPOTTING SCOPE

- Remove any dust from the lenses with a blower and/or a soft lens brush which can be purchased from any camera shop. The lenses can be cleaned using approved lens cleaning solution and a soft lens cloth.
- The body can be wiped over with a soft damp cloth, **DO NOT** use any chemicals or abrasive cleaners.
- When the scope is not to be used for long periods, store it in a well ventilated location, avoiding high temperatures and humidity.
- Avoid strong impacts caused by bumping or dropping the scope.
- **DO NOT** apply excessive force when using the scope.

## Assembling the Scope

Before the scope is used it must be assembled first, the scope and tripod are stored in the carry case and should always be disassembled and returned to the case when finished spotting.

Stand the tripod on a flat level surface, ensure all three legs are fully open.

Position the scope onto the tripod, lining up the securing screw (H) with the threaded hole in the block attached to the scope body.

Before tightening the securing screw (finger tight only), ensure the block is in line with the tripod support platform, tighten securing screw (finger tight only).

**Clarke** INTERNATIONAL

## Instructions For Use

Stand the assembled scope on a surface capable of supporting all three tripod feet. Ensure all three legs are open fully, and ensure the scope cannot fall over, as this could damage it.

Loosen the pan lever (F) by turning the handle anticlockwise, aim the scope at the desired subject.

Using either eye look through the eyepiece whilst closing the other eye and locate the subject using the pan lever.

When you are able to see the subject in the centre of the lens, gently lock the pan lever by turning the handle clockwise, **(DO NOT OVERTIGHTEN)**.

Adjust the focus ring until the optimum view is obtained.

Now adjust the zoom ring to the desired magnification, sometimes it may be necessary after adjusting the zoom to re-focus slightly using the focus ring again.